

E8 Series

Seal support reservoir

Liquid lubricated dual mechanical seal reliability is vitally dependent on the continuous supply of clean, cool buffer or barrier fluid. E8 Series seal support reservoirs are well-suited to maintain an optimum environment for Plan 52 unpressurized and Plan 53A pressurized dual mechanical seals.



E8 Series seal support reservoirs are an effective and versatile element of a dual mechanical seal system. Configurable with many popular features, the 11 liter reservoir is easy to install and maintain with water or other lubricating fluids. The E8 Series is available for a variety of industry services including applications in Chemical, Corn Processing, Pulp and Paper, Municipal Water, and Sewage.

Operating Parameters


Pressure	11 bar
Temperature	-29°C to 100°C
Volume	11 liter

Design Specifications

Compliance with PED (97/23/EC) and API 682

Standard and Optional Components


	Plan 52	Plan 53A
Level indicator	standard	standard
Ball valve (2)	standard	standard
Orifice	standard	none
Pressure switch	optional	optional
Level switch	optional	optional
Cooling coil	optional	optional
Stand kit	optional	optional
Hose kit	optional	optional
Hand pump	optional	optional
ASME U-stamp	optional	optional

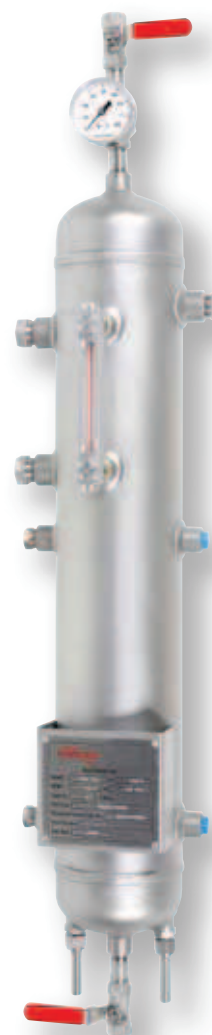

E8 Series Piping Plans and Application

Piping Plan	Description	Purpose	Application
Plan 52	Unpressurized buffer fluid circulation with an orifice in the vent	Reduces opportunity for process emissions by allowing the outboard seal to act as a safety backup	Critical process fluids in applications that don't require complete isolation but the added safety of an installed spare seal is advantageous. Used in general industry services.
Plan 53A	Pressurized barrier fluid circulation set 1-2 bar above process pressure	Barrier fluid effectively isolates the process fluid for zero process emissions operation	Hazardous, toxic, aggressive and dirty fluids that are not allowed to leak to the atmosphere. Used in Chemical and general industry services.

General Purpose Arrangement

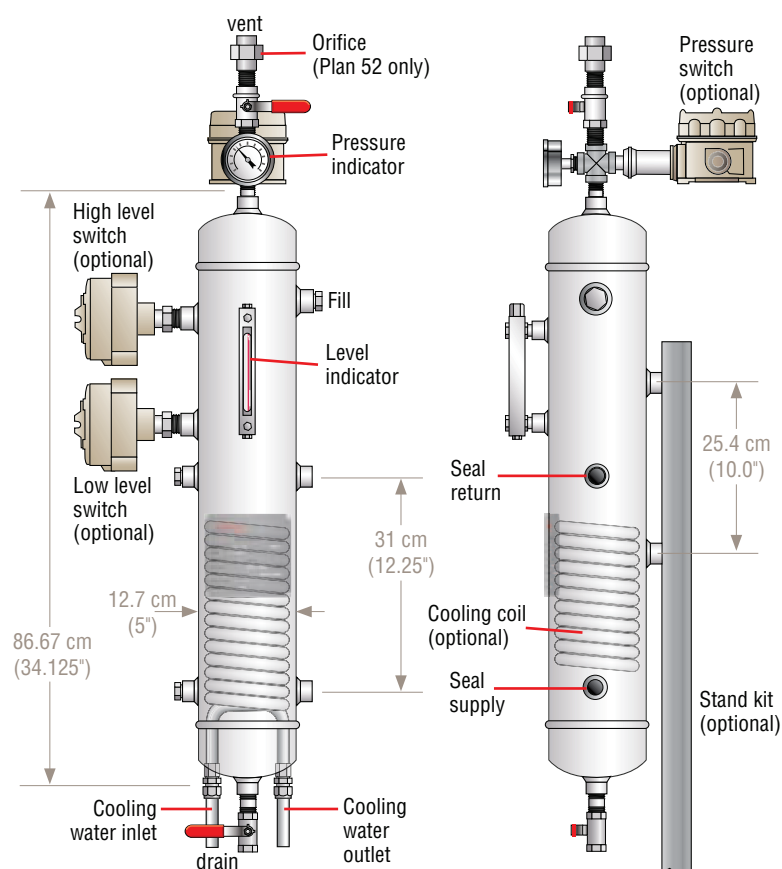

FSD247eng REV 02/12 Printed in USA

To find your local Flowserve representative
and find out more about Flowserve Corporation visit
www.flowserve.com

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

© Flowserve Corporation (2012)

Features

- **11 liter reservoir** in 304 or 316 SS contains enough buffer/barrier fluid for sufficient seal face lubrication and heat transfer (standard)
- **Fluid level indicator** in aluminum or 316 SS provides a quick visual measure of fluid level (standard)
- **Cooling coil** in 316 SS controls the reservoir temperature by means of heating or cooling with water to maintain the optimum seal operating temperature (optional)
- **Pressure indicator** with stainless steel case and 62 mm dial accurately displays barrier/buffer pressure in the reservoir (standard)
- **Pressure switch** triggers a low pressure alarm if the reservoir pressure decreases on a Plan 53A system or a high pressure alarm if the reservoir pressure increases on a Plan 52 system (optional)
- **Ultrasonic level switches** monitor the barrier/buffer fluid level and activate a low or high level alarm, alerting the operator to adjust the fluid level (optional)
- **Stand kit** of durable painted carbon steel securely supports the reservoir system and accommodates mounting of the optional hand pump (optional)

Europe, Middle East, Africa
Roosendaal, the Netherlands
Telephone: 31 165 581400
Telefax: 31 165 554590

USA
Tulsa, Oklahoma, USA
Telephone: 1 918 582 6953
Telefax: 1 918 583 1071